




TPTECH CO.,LTD
0894085703



ACCESSORIES

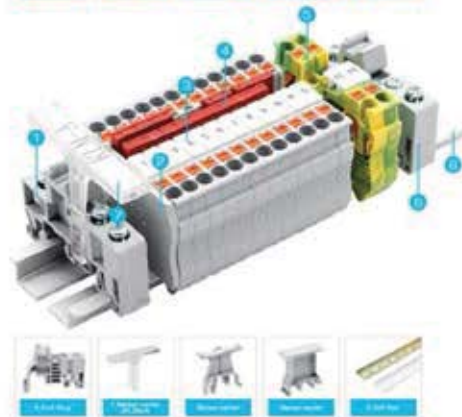

No.	PART NO.	DETAIL	PIC.	PRICE	REF.
1	JPT 2.5	800V/31A 0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		12 บาท	End cover: D-JST 2.5 Plug-in bridge: FBS 2-5,3-5, 4-5, 5-5, 10-5 Marker strip: ZB 5
2	JPT 4	800V/41A 0.5-6mm ² /0.5-4mm ² L56/H36.5/W6.2 mm		18 บาท	End cover: D-JST 4 Plug-in bridge: FBS 2-6,3-6, 4-6, 5-6, 10-6 Marker strip: ZB 6
3	JPT 6	1000V/57A 0.5-10mm ² /0.5-6mm ² L57.7/H43.5/W8.2 mm		30 บาท	End cover: D-JPT 6 Plug-in bridge: FBS 2-8,3-8, 4-8, 5-8, 10-8 Marker strip: ZB 8
4	JPT 2.5-PE	0.2-4mm ² /0.2-2.5mm ² L48.5/H35.5/W5.2 mm		38 บาท	End cover: D-JST 2.5 Marker strip: ZB 5
5	JPT 4-PE	0.5-6mm ² /0.5-4mm ² L56/H36.5/W6.2 mm		50 บาท	End cover: D-JST 4 Marker strip: ZB 6
6	JPT 6-PE	0.5-10mm ² /0.5-6mm ² L57.7/H43.5/W8.2 mm		75 บาท	End cover: D-JPT 6 Marker strip: ZB 8
7	D-JST2.5	END COVER JPT2.5 / JPT2.5-PE		4 บาท	
8	D-JST4	END COVER JPT4 / JPT4-PE		6 บาท	
9	D-JST6	END COVER JPT6 / JPT6-PE		12 บาท	
10	E /UK	STOPPER CLAMP		10 บาท	
11	Plug In Terminal Bridge				



TPTECH

www.tpotech.co.th

594/22 Hatairat Rd. Bangchan Klongsamwa Bangkok Thailand .10510
Tel.02-1707852-3 , mobile :0894085703 E-mail : tpotech2014@gmail.com



PUSH-IN CONNECTION TERMINAL BLOCKS


Easy insertion performance: push-in
direct connection technology.



Phoenix Push In Din Rail Mounted Terminal Blocks

JPT 2.5

PRODUCT PARAMETERS

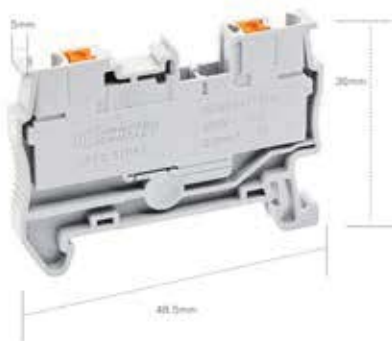

Model No.	JPT- 2.5	Cross section	0.2-2.5mm ²
Rated voltage	800V	Rated current	31A
Test phase	D-JST 2.5	Marker strip	ZB 4

Technical Parameters

Model Number	JPT 2.5
Color	Grey, Blue, other color can be customized
Length/Height/Wide (mm)	48.5/36/5
Connection method	Push in connection
Material	Anti flaming Nylon PA66
Rated Voltage/Current	800V/31A
Cross section, solid/soft Cable	0.2-4mm ² / 0.2-2.5mm ²
Conductor Size	24-12 AWG
Mounting Type	NS 35/7.5
Standard	IEC 60947-7-1
LOGO	WonkeDQ, OEM service is supporting
Packing Detail	5.79g/pc, 100PCS/BOX
Certification	CE/RoHS/CQC/ISO 9001

JPT 4

PRODUCT PARAMETERS




Model No.	JPT-4	Cross section	0.5-4mm ²
Rated voltage	800V	Rated current	41A
Test phase	D-JST 4	Marker strip	ZB 4

Technical Parameters

Model No.	JPT 4
Color	Grey, Blue, other color can be customized
Length/Height/Wide (mm)	56/36.5/6.2
Connection method	Push in connecting
Material	Nylon PA66
Rated Voltage/Current	800V/31A
Cross section, solid/soft Cable	0.5-6mm ² / 0.5-4mm ²
Conductor Type	20-10 AWG
Mounted	NS 35 DIN Rail
Standard	IEC 60947-7-1
LOGO	Customized logo are supported
Packing Detail	8.11g/pc, 50PCS/BOX
Certification	CE/RoHS/CQC/ISO 9001

JPT 6

PRODUCT PARAMETERS

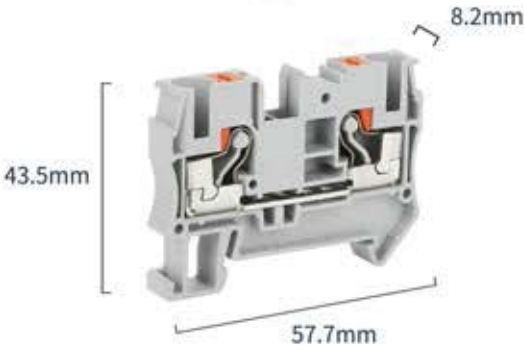

Model No.	JPT-6	Cross section	0.5-6mm²
Rated voltage	1000V	Rated current	57A
End plate	D-JPT 6	Marker strip	ZB 4

Technical Parameters

Model Number	JPT 6
Color	Grey, Blue, other color can be customized
Length/Height/Wide (mm)	57.7/43.5/8.2
Connection method	Push in connecting
Material	Nylon PA66
Rated Voltage/Current	1000V/57A
Cross section, solid/soft Cable	0.5-10mm² / 0.5-6mm²
Conductor Size	20-8 AWG
Mounting Type	NS 35/7.5
Standard	IEC 60947-7-1
LOGO	Customized logo are supported
Packing Detail	14.97g/pc, 50PCS/BOX
Certification	CE/RoHS/CQC/ISO 9001

JPT -PE Protective PE Terminal Blocks Protective Conductor Earthing Terminal Blocks Push In


PRODUCT PARAMETERS



Model No.	JPT2.5-PE	Cross section	0.2-2.5mm²
End plate	D-JST 2.5	Marker strip	ZB 4

JPT 2.5-PE


PRODUCT PARAMETERS

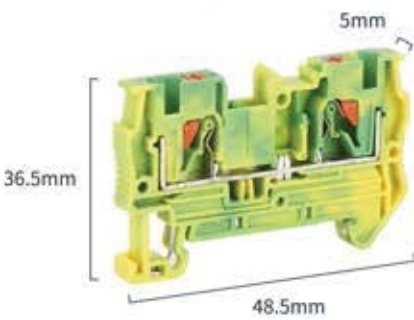

Model No.	JPT4-PE	Cross section	0.5-4mm²
End plate	D-JST 2.5	Marker strip	ZB 4

JPT 4-PE

PRODUCT PARAMETERS

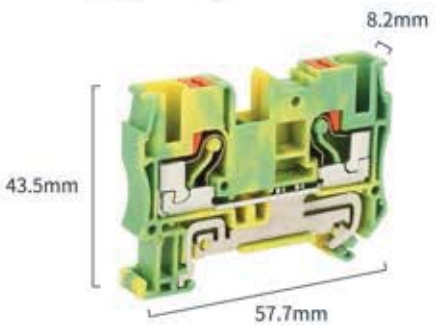

Model No.	JPT6-PE	Cross section	0.5-6mm²
End plate	D-JST 6	Marker strip	ZB 4

JPT 6-PE



E/JUK UK
Terminal End Clamp



FBS Plug in Terminal Bridge

